

4.1 Pressureless Dome-Cover

with crossarm profile-gasket




Standard design

- Wetted material: 1.4571 or 1.4404
Attachment parts: 1.4301
- Plastic-handles with washer and brass insert (M12)
- Siliconegasket
- Foldable cover
- Surface: Cover: brushed sheet metal, Neck Electropolished, from NW 600
or neck length > 200 mm neck unpolished, pickled

Options

- Wetted materials: 1.4462, 1.4539, 1.4435, etc.
- Various gasket qualities
- Various handles (Stainless steel, toggle, nuts etc.)
- Cover swing- and foldable
- Installation of various nozzles (sightglasses, TC-ferrule, etc.)
- With various limit- or proximity-switches
- With safety-grill or safety-cross
- Various surface qualities (polished up to $R_a < 0,2\mu\text{m}$)
- Neck shaped to match tank-diameter
- etc.

NW	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	s [mm]
100	100	60	110	230	2	2
150	150	65	110	280	2	2
200	200	70	110	335	2	2
250	250	75	110	385	2	2
300	298	85	120	440	2,5	2
400	415	100	120	550	2,5	2
460	460	115	120	595	2,5	2
500	505	125	120	650	2,5	2
600	603	140	120	740	2,5	2
800	810	140	135	950	3	2,5

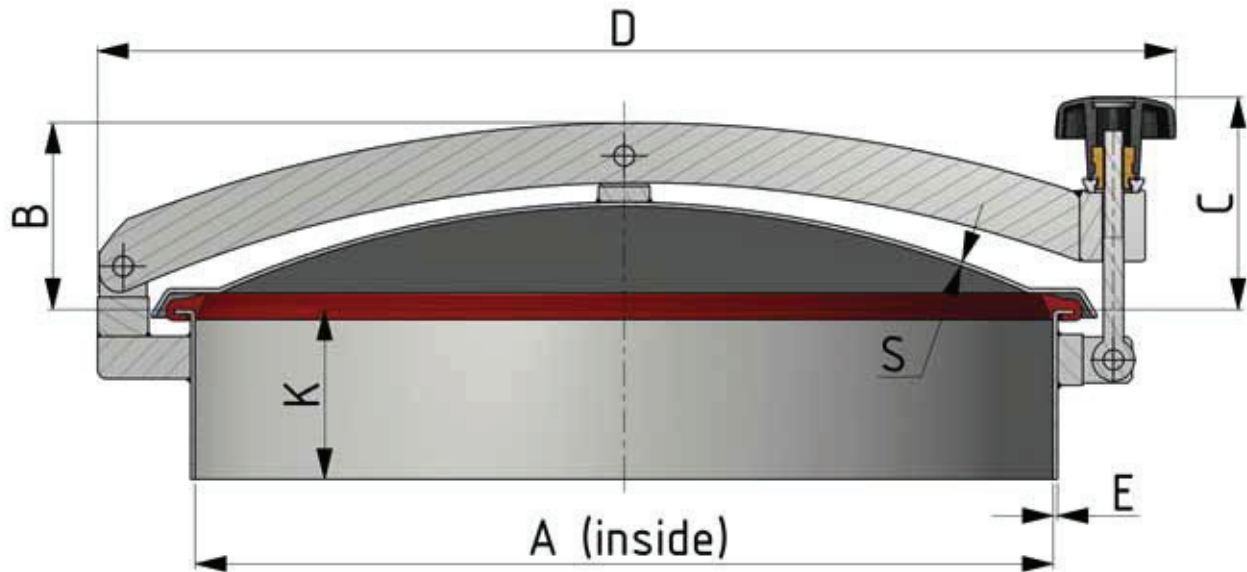

zimmerlin
EDELSTAHL-TECHNIK



Zimmerlin GmbH
Edelstahl-Technik
Frohmatenstr. 19
D-79268 Bötzingen

Tel. +49(0)7663-6088-0
Fax +49(0)7663-6088-88
info@zimmerlin.de
www.zimmerlin.de



Stand: Juni 2015

Art Nr.	NW	Neck length [k]	Weight [kg]	Price in EUR
310 600	100	60	2,4	
311 000	100	100	2,6	
Neck length per started 50 mm			0,3	
315 600	150	60	2,6	
315 000	150	100	2,8	
Neck length per started 50 mm			0,4	
320 600	200	60	3,3	
321 000	200	100	3,5	
Neck length per started 50 mm			0,5	
325 600	250	60	4,3	
325 000	250	100	4,5	
Neck length per started 50 mm			0,7	
330 600	300	60	5,5	
331 000	300	100	6	
Neck length per started 50 mm			1	
341 000	400	100	10	
341 500	400	150	11	
342 000	400	200	12,5	
Neck length per started 50 mm			1,3	
346 000	460	100	11	
346 500	460	150	12,5	
346 200	460	200	14	
Neck length per started 50 mm			1,5	
351 000	500	100	11,7	
351 500	500	150	13,7	
352 000	500	200	15,6	
Neck length per started 50 mm			1,7	
361 000	600	100	16	
361 500	600	150	18,5	
362 000	600	200	21	
Neck length per started 50 mm			2	
381 000	800	100	31	
381 500	800	150	34	
382 000	800	200	38	
Neck length per started 50 mm			3	

Gaskets see chapter 9.4



Stand: Juni 2015

Tel. +49(0)7663-6088-0
 Fax +49(0)7663-6088-88
 info@zimmerlin.de
 www.zimmerlin.de

Zimmerlin GmbH
 Edelstahl-Technik
 Frohmattenstr. 19
 D-79268 Bötzingen

